

Flat suction cup (round)

PFG 50 NBR-55 N008

Część nr.: 10.01.01.00017

<https://www.schmalz.com/10.01.01.00017>

Strona główna > Technologia podciśnienia w automatyce > Komponenty podciśnieniowe > Przyssawki podciśnieniowe > Przyssawki płaskie (okrągłe)
> PFG 50 NBR-55 N008

Przyssawka płaska (okrągła)




Size: 50

Suction cup material: Nitrile rubber NBR

Material hardness [Shore A]: 55 Shore A

Dane projektowe

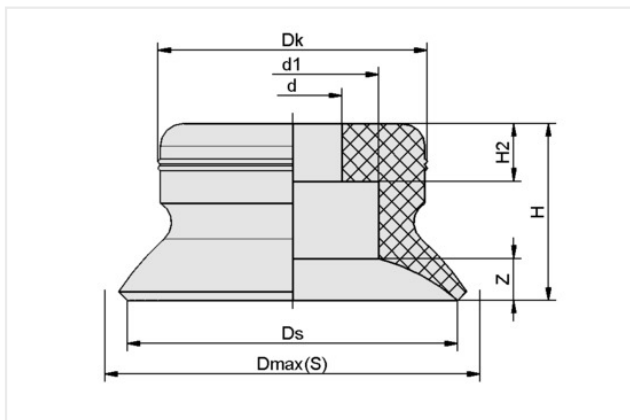

Atrybut	Wartość
d	8 mm
d1	20 mm
Dk	29,10 mm
Dmax(S)	53,50 mm
Ds	50 mm
H	15 mm
H2	7 mm
Z (Stroke)	4 mm

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

Dane techniczne

Atrybut	Wartość
Suction force (-600mbar)	91 N
Volume	7,08 cm ³
Curve radius (min) (convex)	75 mm
Size	50
Nipple family	N 008
Suction cup material	Nitrile rubber NBR
Material hardness [Shore A]	55 Shore A

Kontakt z firmą Schmalz

Schmalz Sp.z.o.o. | ul. Fabianowska 131/A1, 62-052 Komorniki, Poland | +48 61 628 67 70 | schmalz@schmalz.pl

Flat suction cup (round)

PFG 50 NBR-55 N008

Część nr.:10.01.01.00017

<https://www.schmalz.com/10.01.01.00017>

Weight 10,20 g

Product family PFG

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface - they do not include a safety factor
Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

Akcesoria



SA-NIP N008 G1/8-AG DN350

Część nr.:10.01.01.03532

Thread G1: G1/8"-M

Length L1: 22 mm

Fitting length: 5 mm

Material: Aluminum

Spanner size SW2: 4 mm



SA-NIP N008 G1/8-IG DN350

Część nr.:10.01.01.03524

Thread G1: G1/8"-F

Length L1: 25 mm

Fitting length: 16 mm

Material: Aluminum

Spanner size SW2: 4 mm

Kontakt z firmą Schmalz

Schmalz Sp.z.o.o. | ul. Fabianowska 131/A1, 62-052 Komorniki, Poland | +48 61 628 67 70 | schmalz@schmalz.pl

Flat suction cup (round)

PFG 50 NBR-55 N008

Część nr.:10.01.01.00017

<https://www.schmalz.com/10.01.01.00017>



SU 50

Część nr.:10.01.01.12837

Size: 50

Clamping range: 45.0 ... 60.0 mm

Temperature resistance: 80 °C